

For EMC/EMI and other instrumentation applications.

Provides a minimum of 250 watts of power in a 5 rack unit package, across the 2.0 to 8.0 GHz frequency range.

Touchscreen Graphical Interface

State of the art touchscreen interface with both amplifier and/or system level control capabilities. Includes fault logs, parameter trending and scopescreen for monitoring performance. Internal switch control eliminates need for external controllers.

Easy to Maintain

Modular design and built-in fault diagnostic capability with convenient and clearly visible indicators for easy maintainability in the field. A USB port is available for uploading new firmware and system configurations, and downloading logs and system configurations for cloning to other units.

Meets Global Requirements

Meets International Safety Standard EN-60215, Electromagnetic Compatibility 2014/30/EU and Harmonic Standard EN-61000-3-2 to satisfy worldwide requirements. CE Marked.

Worldwide Support

Backed by over 40 years of satellite communications experience, and CPI's worldwide 24-hour customer support network that includes more than 20 regional factory service centers.



CPI 250/320 W S/C-band TWTAs, Model TZSC6963J1



OPTIONS:

- Input isolator (-1 dB gain)
- Remote control panel
- 115 VAC external step-up transformer
- LifeExtender/LifePredictor

Quality Management
System - ISO 9001:2015



Specification		CPI Model TZSC-6963J1, 250/320W S/C-Band TWTA	
Frequency	2.0 to 8.0 GHz		
Output Power (min.), TWT	320 W CW		250 W CW
Output Power (min.), Flange	224 W from 2.0 to 2.5 GHz, 290 W from 2.5 to 7.5 GHz, 275 W from 7.5 to 8.0 GHz		225 W CW
Bandwidth	6.0 GHz		
Gain	54 dB min. at rated power output; 56 dB typ. at small signal		
RF Level Adjust Range	0 to 20 dB continuous		
Gain Stability	±0.25 dB/24 hr max. (after 30 minute warmup and at constant drive and temperature)		
Gain Variation	12 dB pk-pk over 6.0 GHz bandwidth, typ.		
VSWR	Input Output Load	2.5:1 typ, 1.7:1 max. (with optional input isolator) 2.5:1 typ.	
		1.5:1 max. full spec compliance; 2.0:1 max. continuous operation; any value without damage	
Residual AM	-50 dBc below 10 kHz; -20[1.3 + log F (kHz)] dBc, 10 kHz to 500 kHz; -85 dBc above 500 kHz		
Phase Noise	Meets IESS 308/309		
Noise and Spurious	-50 dBc typ. excluding harmonics		
Harmonic Content	-3 dBc typ. at lower band edge		
Prime Power	220 to 240 VAC single phase ±10%, 47 to 63 Hz		
Radiated Immunity	10 V/m (for higher immunity levels, contact CPI)		
Power Consumption	2.6 kVA typ, 3.0 kVA max.		
Inrush Current	200%		
Ambient Temperature	0°C to +40°C operating; -54°C to +71°C non-operating		
Relative Humidity	95% non-condensing		
Operating Altitude	10,000 ft above sea level (3,048 m), with standard adiabatic de-rating of 2° per 1,000 feet; 40,000 ft non-operating		
Shock and Vibration	Designed to meet conditions normally encountered in the laboratory		
Acoustic Noise	73 dBA one meter from front panel		
Cooling	Forced air with integral blower. Rear air intake and exhaust		
Input RF Connector	Type N Female		
Output RF Connector	Type N Female		
RF Power Monitors	Type N Female, -50 dB nominal		
M&C Interface	GPIB, RJ45 Ethernet, includes embedded GUI control (RS422/485, RS232 serial interface optional)		
USB Port	Download/Upload software, logs		
Dimensions	19" W x 8.75" H x 26.0" L (483 x 222 x 661 mm)		
Weight	110 lbs (50 kg) nom.		
Safety	EN-60215		

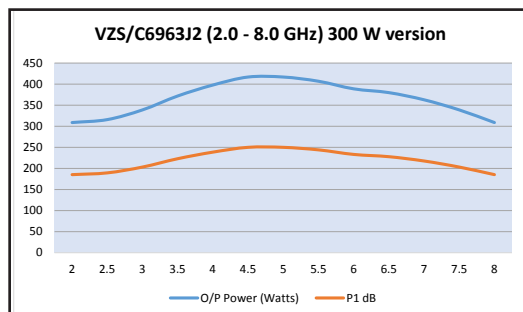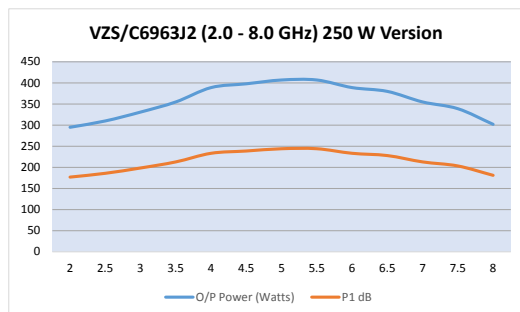

Typical output power by frequency



SMP Division
Satcom Products
tel: +1 (669) 275-2744
email: satcommarketing@cpii.com
web: www.cpii.com/satcom

For more detailed information, please refer to the corresponding CPI technical description if one has been published, or contact CPI. Specifications may change without notice as a result of additional data or product refinement. Please contact CPI before using this information for system design.

© 2020 Communications & Power Industries LLC. Company proprietary; use and reproduction is strictly prohibited without written authorization from CPI.